
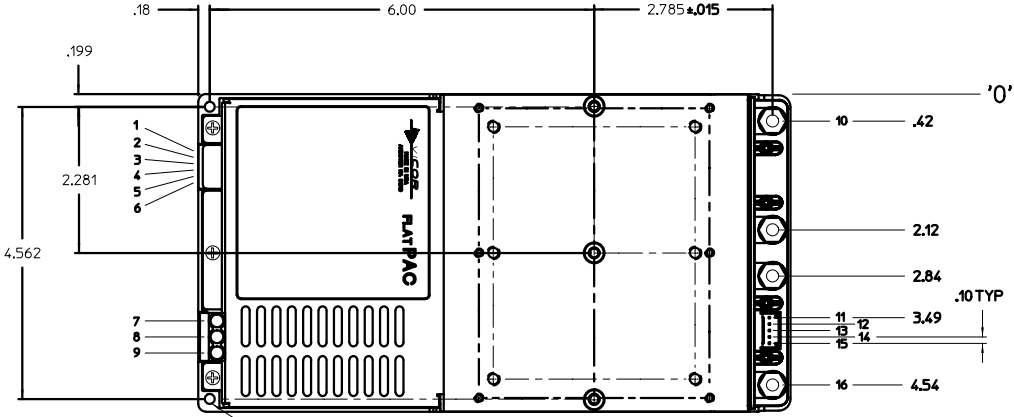
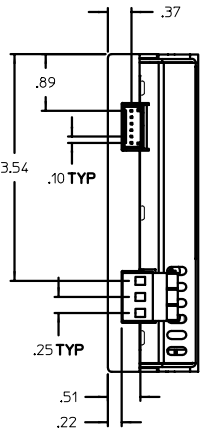


VICOR CONFIDENTIAL



THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APVD
01	RELEASED PER E970285	DPK	7/2/97
02	REVISED PER E980099	DMC	3/23/98

- 1 MOD DIS -
- 2 MOD DIS +
- 3 AC OK -
- 4 AC OK +
- 5 BUS OK -
- 6 BUS OK +
- 7 AC IN L1
- 8 AC IN L2/N
- 9 CHASSIS GND
- 10 + OUT
- 11 + OUT SENSE
- 12 + SENSE
- 13 TRIM
- 14 - SENSE
- 15 - OUT SENSE
- 16 - OUT

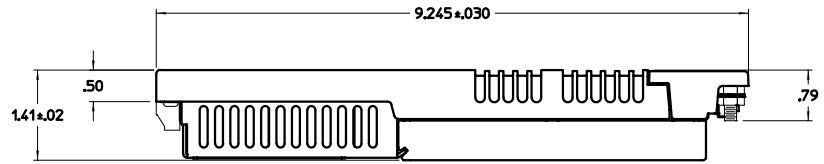

#10-32 STUD
4 PLS

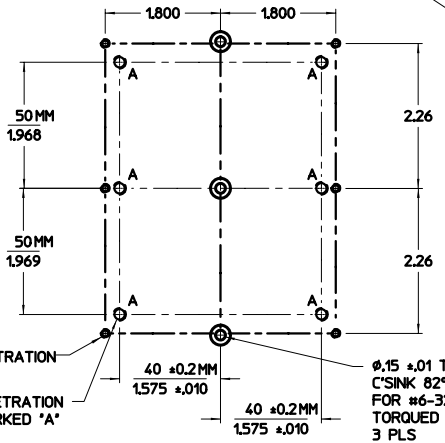

Ø.15 ±.01 THRU
FOR #6-32 SCREW
TORQUED 8 IN LBS
2 PLS

SINGLE OUTPUT
'M' CONFIGURATION

#6-32 UNC-2B, MAX. PENETRATION
14.27mm/.562" 6-PLS.
M5 X .8 - 6H, MAX. PENETRATION
14.27mm/.562" 6-PLS MARKED 'A'

Ø.15 ±.01 THRU HOLE
C'SINK 82° ±2° TO Ø.31
FOR #6-32 FLAT HEAD SCREW
TORQUED 8 IN LBS
3 PLS

MOUNTING HOLE PATTERN

NOTES:
1. MOUNTING HOLE DIMENSIONS ARE METRIC INCH

DESIGNED BY	DATE	VICOR	
DRW. NO.	DATE	OUTLINE DRAWING, 400 W A/R FLATPAC M CONFIG	
SCALE	SCALE	DWG NO.	REV
D	07/91	16756	02
SCALE FULL		SHEET 1 OF 1	