


**VICOR CONFIDENTIAL**

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
1	RELEASED PER E101301	AR	10/21/10
2	REVISED PER E170323a	GCK	04/03/17
3	REVISED PER E180886	GCK	01/10/19

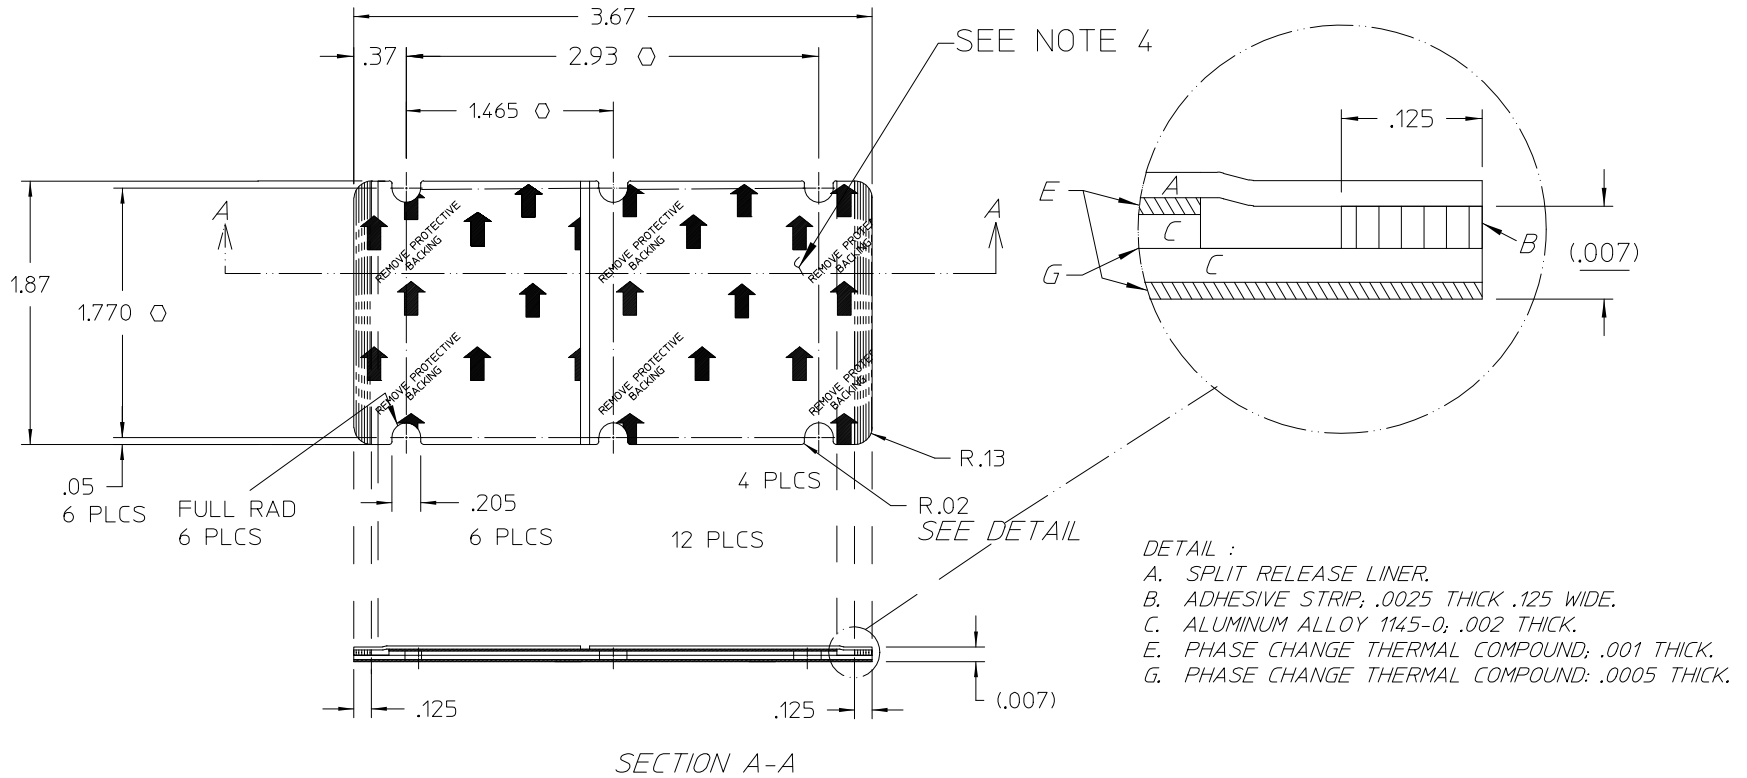

DETAIL :  
 A. SPLIT RELEASE LINER.  
 B. ADHESIVE STRIP; .0025 THICK .125 WIDE.  
 C. ALUMINUM ALLOY 1145-0; .002 THICK.  
 E. PHASE CHANGE THERMAL COMPOUND; .001 THICK.  
 G. PHASE CHANGE THERMAL COMPOUND; .0005 THICK.

SECTION A-A

(VERTICAL THICKNESS IS NOT SHOWN TO SCALE)

NOTES:

1. MATERIAL: MAKE FROM HENKEL AL-2-36H-187
2. THICKNESS: .007±.001.
3. SEE DETAIL FOR ASSY ORDER.
4. FOR ARTWORK SHOWN HERE SEE DWG# 20200.
5. O DENOTE CRITICAL CHARACTERISTIC FOR LOT INSPECTION.
6. RoHS COMPLIANT PER CST-0001 LATEST REVISION.
7. PRIOR TO ASSEMBLY, PRODUCTS SHALL BE STORED IN A COOL, DRY LOCATION IN ORIGINAL PACKAGING AT TEMPERATURES BELOW 40°C (104°F). UNDER THESE CONDITIONS THE SHELF LIFE IS INDEFINITE. THERMMATE PADS CAN BE PRE-APPLIED TO BASEPLATES OR HEAT SINKS WHICH ARE THEN SHIPPED TO A FINAL ASSEMBLY LOCATION, AS LONG AS THE TEMPERATURE DOES NOT EXCEED THE LEVEL INDICATED ABOVE.

DRAWN BY <b>A RACIPANI</b>		DATE <b>08/31/10</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES - TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/64 .XX=+.01 ±1° .XXX=+.005					
THIRD ANGLE PROJECTION 		SIZE <b>B</b>	FSCM NO. <b>67131</b>	DWG NO <b>36968</b>	REV <b>3</b>
DO NOT SCALE DRAWING		SCALE FULL	SHEET 1 OF 1		