
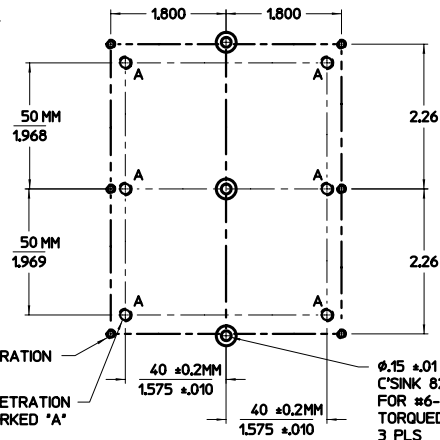
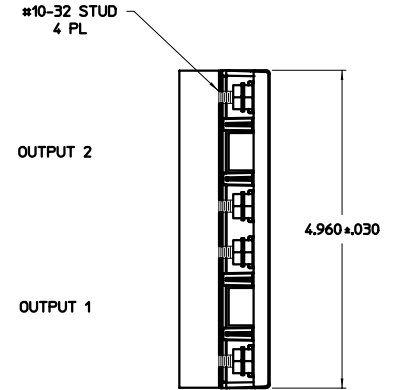
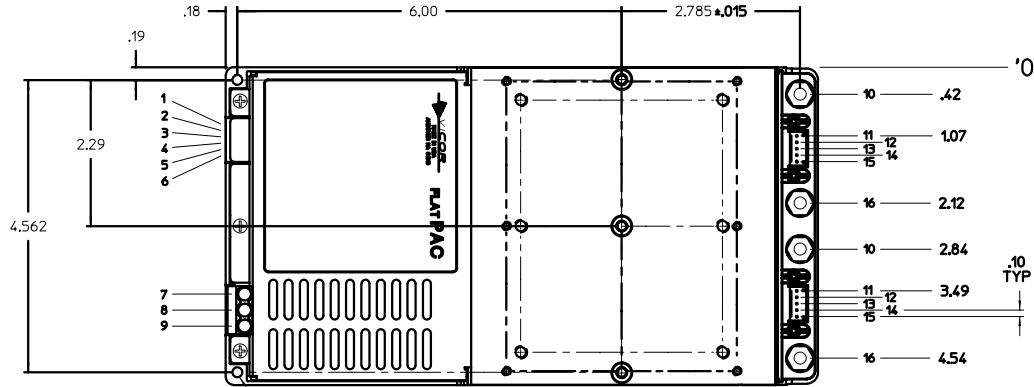
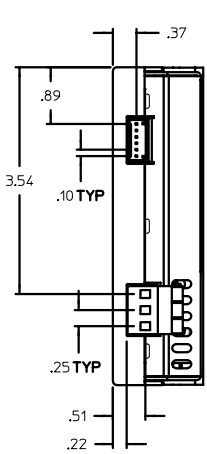


VICOR CONFIDENTIAL  
 THIS DOCUMENT AND THE DATA DISCLOSED  
 HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,  
 USED, OR DISCLOSED IN WHOLE OR IN PART  
 TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APVD
01	RELEASE PER E970285	DPK 7/2/97	RCH
02	REVISED PER E990099	DNC 3/23/98	RCH

- 1 MOD DIS -
- 2 MOD DIS +
- 3 AC OK -
- 4 AC OK +
- 5 BUS OK -
- 6 BUS OK +
- 7 AC IN L1
- 8 AC IN L2/N
- 9 CHASSIS GND
- 10 + OUT
- 11 + OUT SENSE
- 12 + SENSE
- 13 TRIM
- 14 - SENSE
- 15 - OUT SENSE
- 16 - OUT

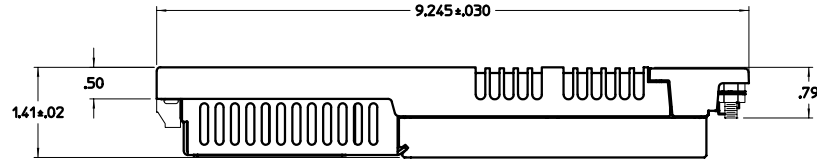

Ø.15 ±.01 THRU  
 FOR #6-32 SCREW  
 TORQUED @ 8 IN LBS  
 2 PLS

### DUAL OUTPUT 'P' CONFIGURATION

#6-32 UNC-2B, MAX. PENETRATION  
 14.27mm/.562" 6-PLS.

M5 X .8 - 6H, MAX. PENETRATION  
 14.27mm/.562" 6-PLS MARKED 'A'

Ø.15 ±.01 THRU HOLE  
 C'SINK 82° ±2° TO Ø.31  
 FOR #6-32 FLAT HEAD SCREW  
 TORQUED @ 8 IN LBS  
 3 PLS

### MOUNTING HOLE PATTERN

NOTES:  
 1. MOUNTING HOLE DIMENSIONS ARE METRIC INCH

DESIGNED BY	DATE	VICOR	
DRW. NO.	DATE	OUTLINE DRAWING, 400 W A/R FLATPAC P CONFIG	
SCALE	FULL	SHEET	1 OF 1