
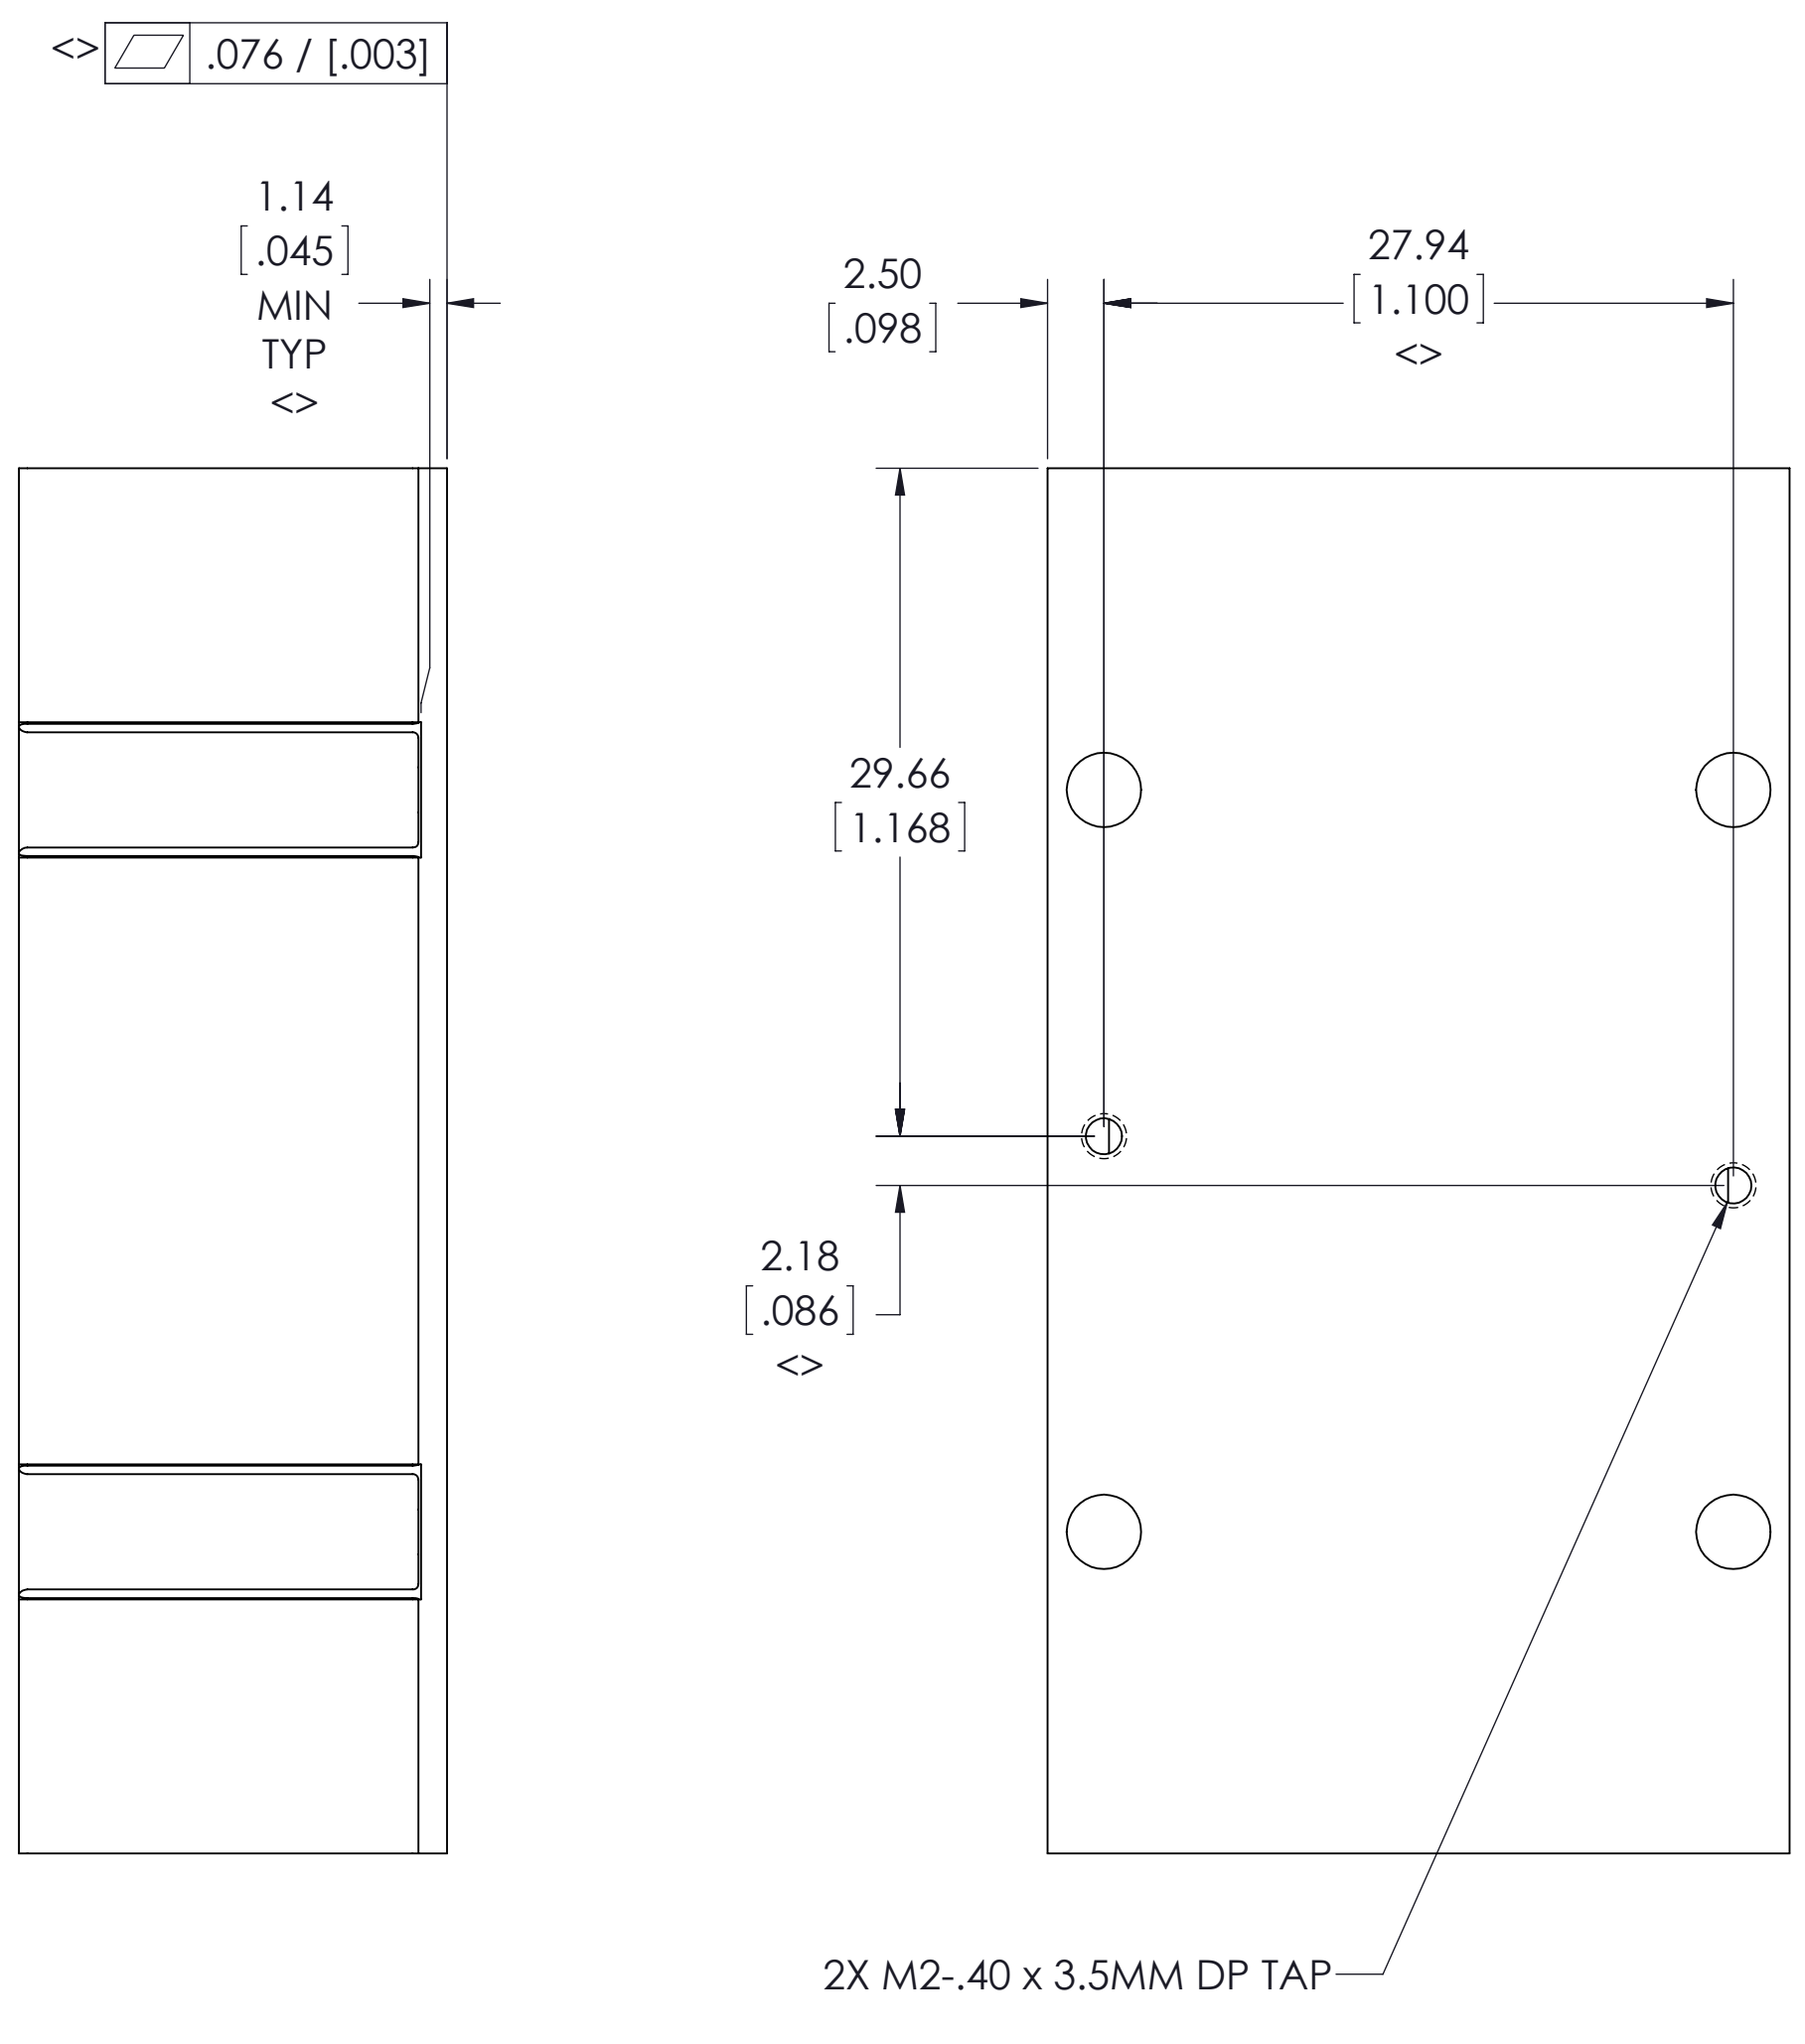



VICOR CONFIDENTIAL  
 THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR  
 HEREWITH IS NOT TO BE REPRODUCED, USED OR  
 DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT  
 THE PERMISSION OF VICOR CORP.


REV.	DESCRIPTION	INTL	DATE	APVD
1	Released per ECO E141368	ESD	01/19/2015	RH

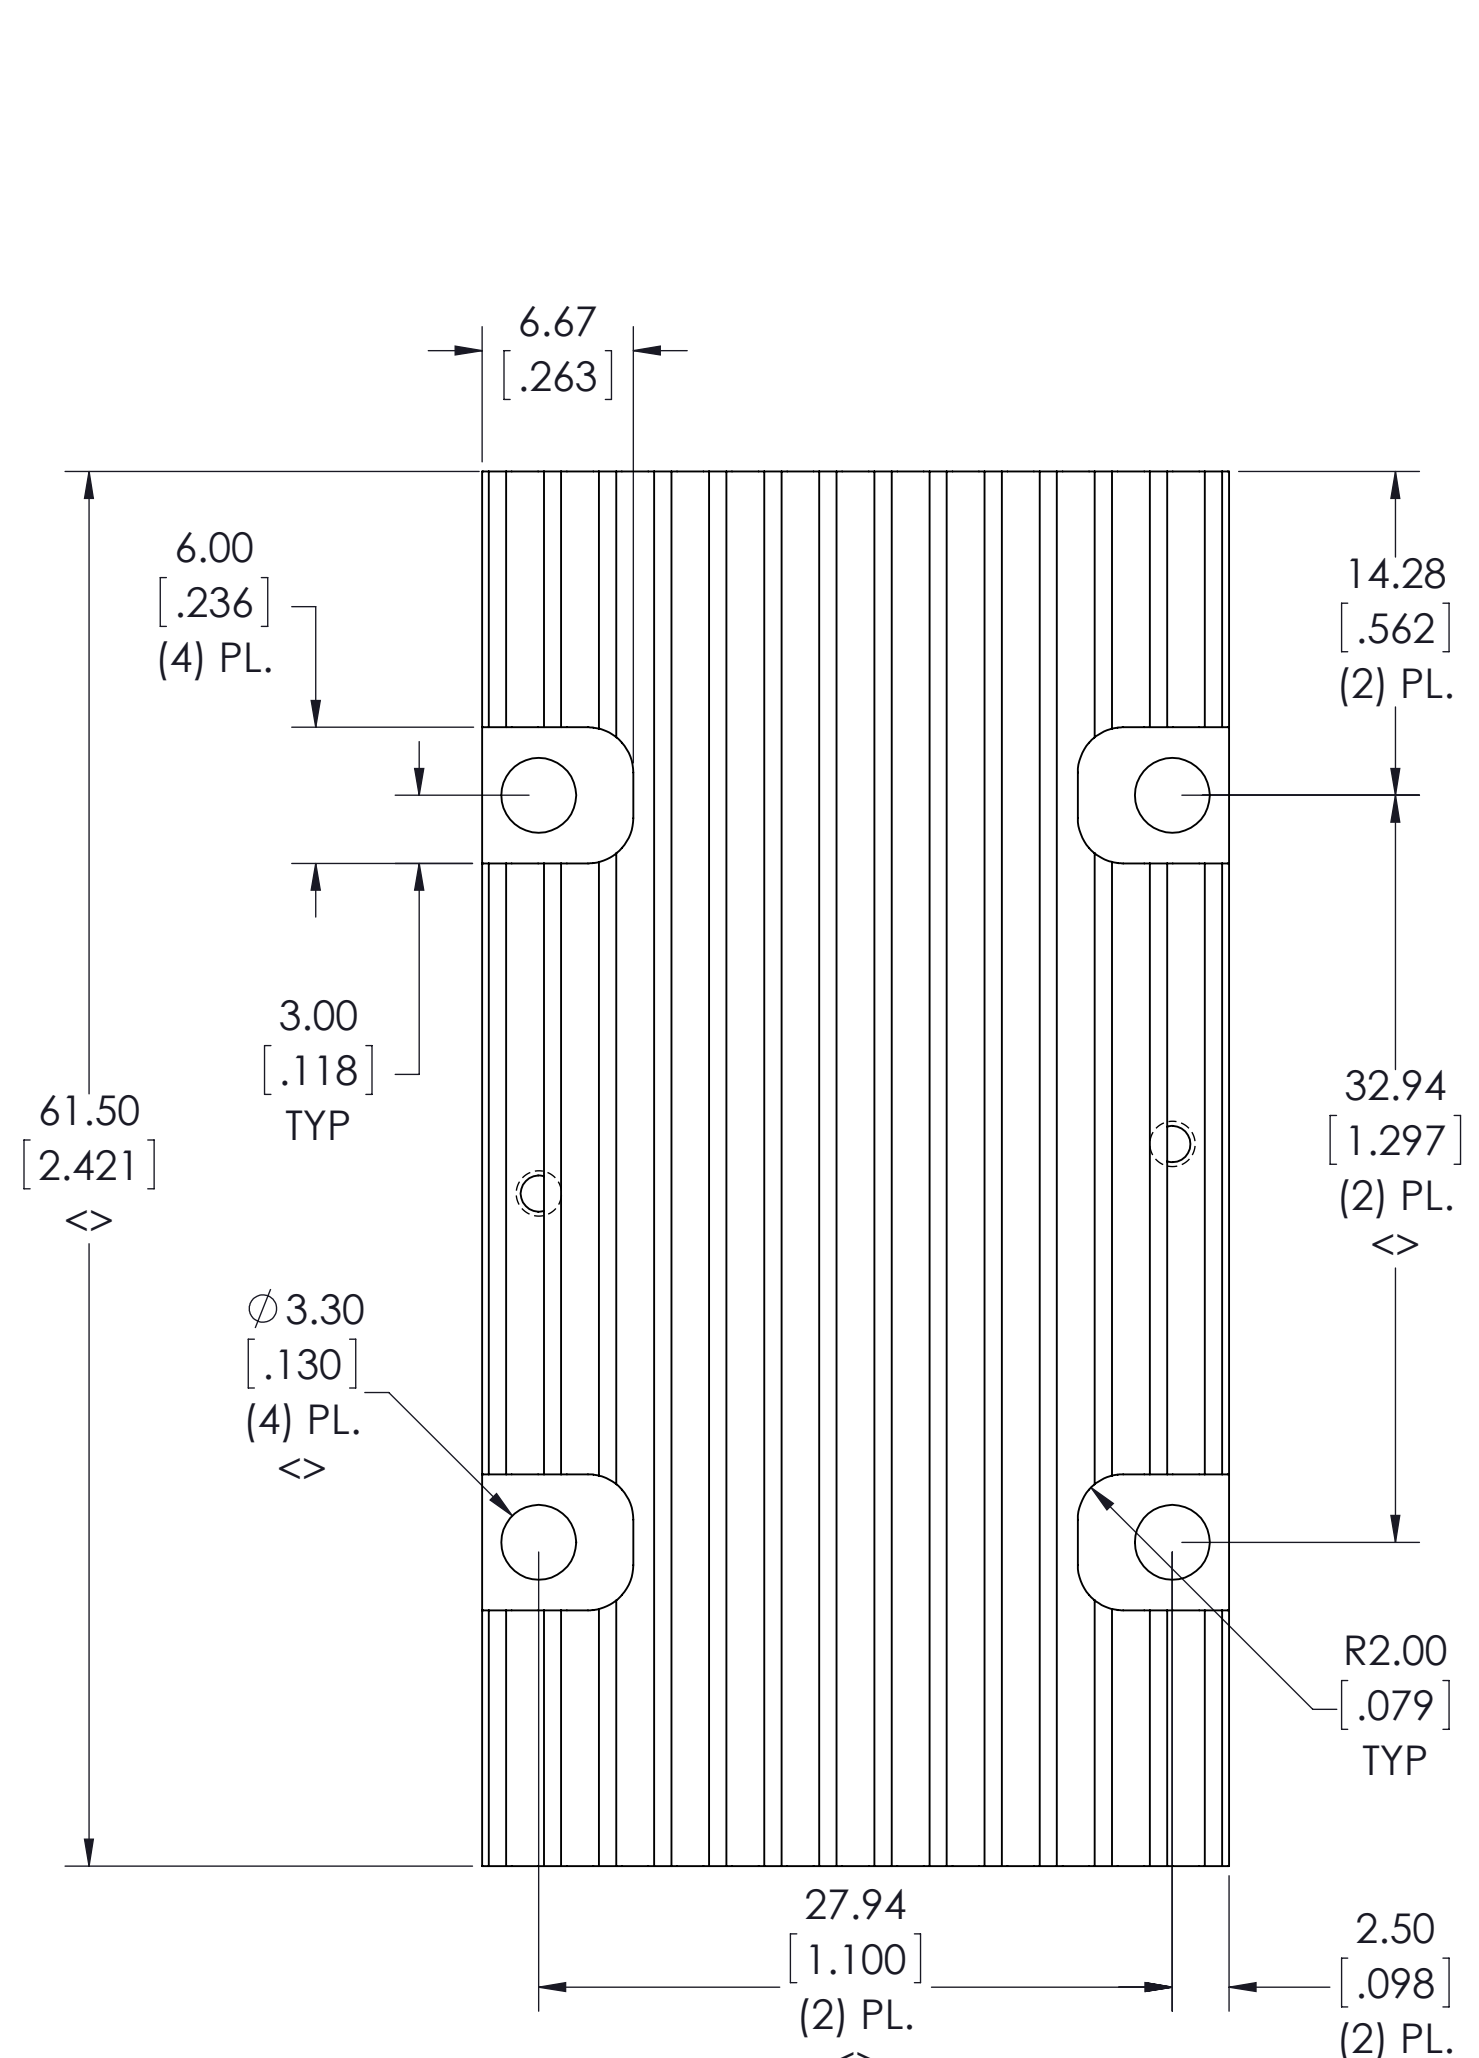

NOTES:

1. CLEAR FINISH, RoHS COMPLIANT PER CST-0001, LATEST REVISION PER A.) CHROMIUM FREE, OR B.) TRIVALENT CHROMIUM IN ACCORDANCE WITH MIL-DTL-5541, TYPE II, CLASS 1A OR 3. SEE CST-0003 FOR TYPES OF AVAILABLE FINISHES.
2. SEE DRAWING 40540 FOR EXTRUSION PROFILE.
3. MATERIAL: ALUM ALLOY 6061-T6
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.

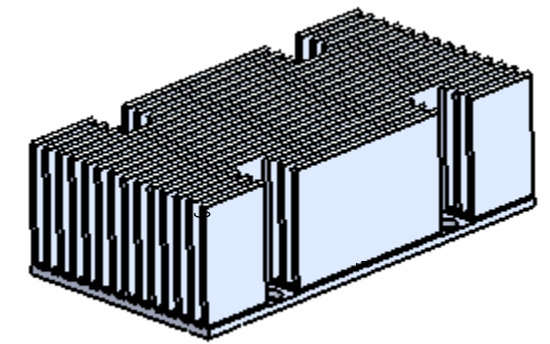

DRAWN BY Robert Wasik	DATE 9/12/2013	<b>VICOR</b> SWD			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MM / (INCH)		<b>HEATSINK, PUSH PIN, TOP, LF, 6123, 19MM</b>			
TOLERANCES ARE: DECIMALS ANGLES X.XX [X.X] = ±0.25 [0.01] ±1° X.XXX [X.XXX] = ±0.127 [0.005]		SIZE <b>C</b>	CAGE CODE <b>67131</b>	DWG NO <b>40263</b>	REV <b>1</b>
THIRD ANGLE PROJECTION  DO NOT SCALE DRAWING		SCALE 3:1		SHEET 1 OF 1	