

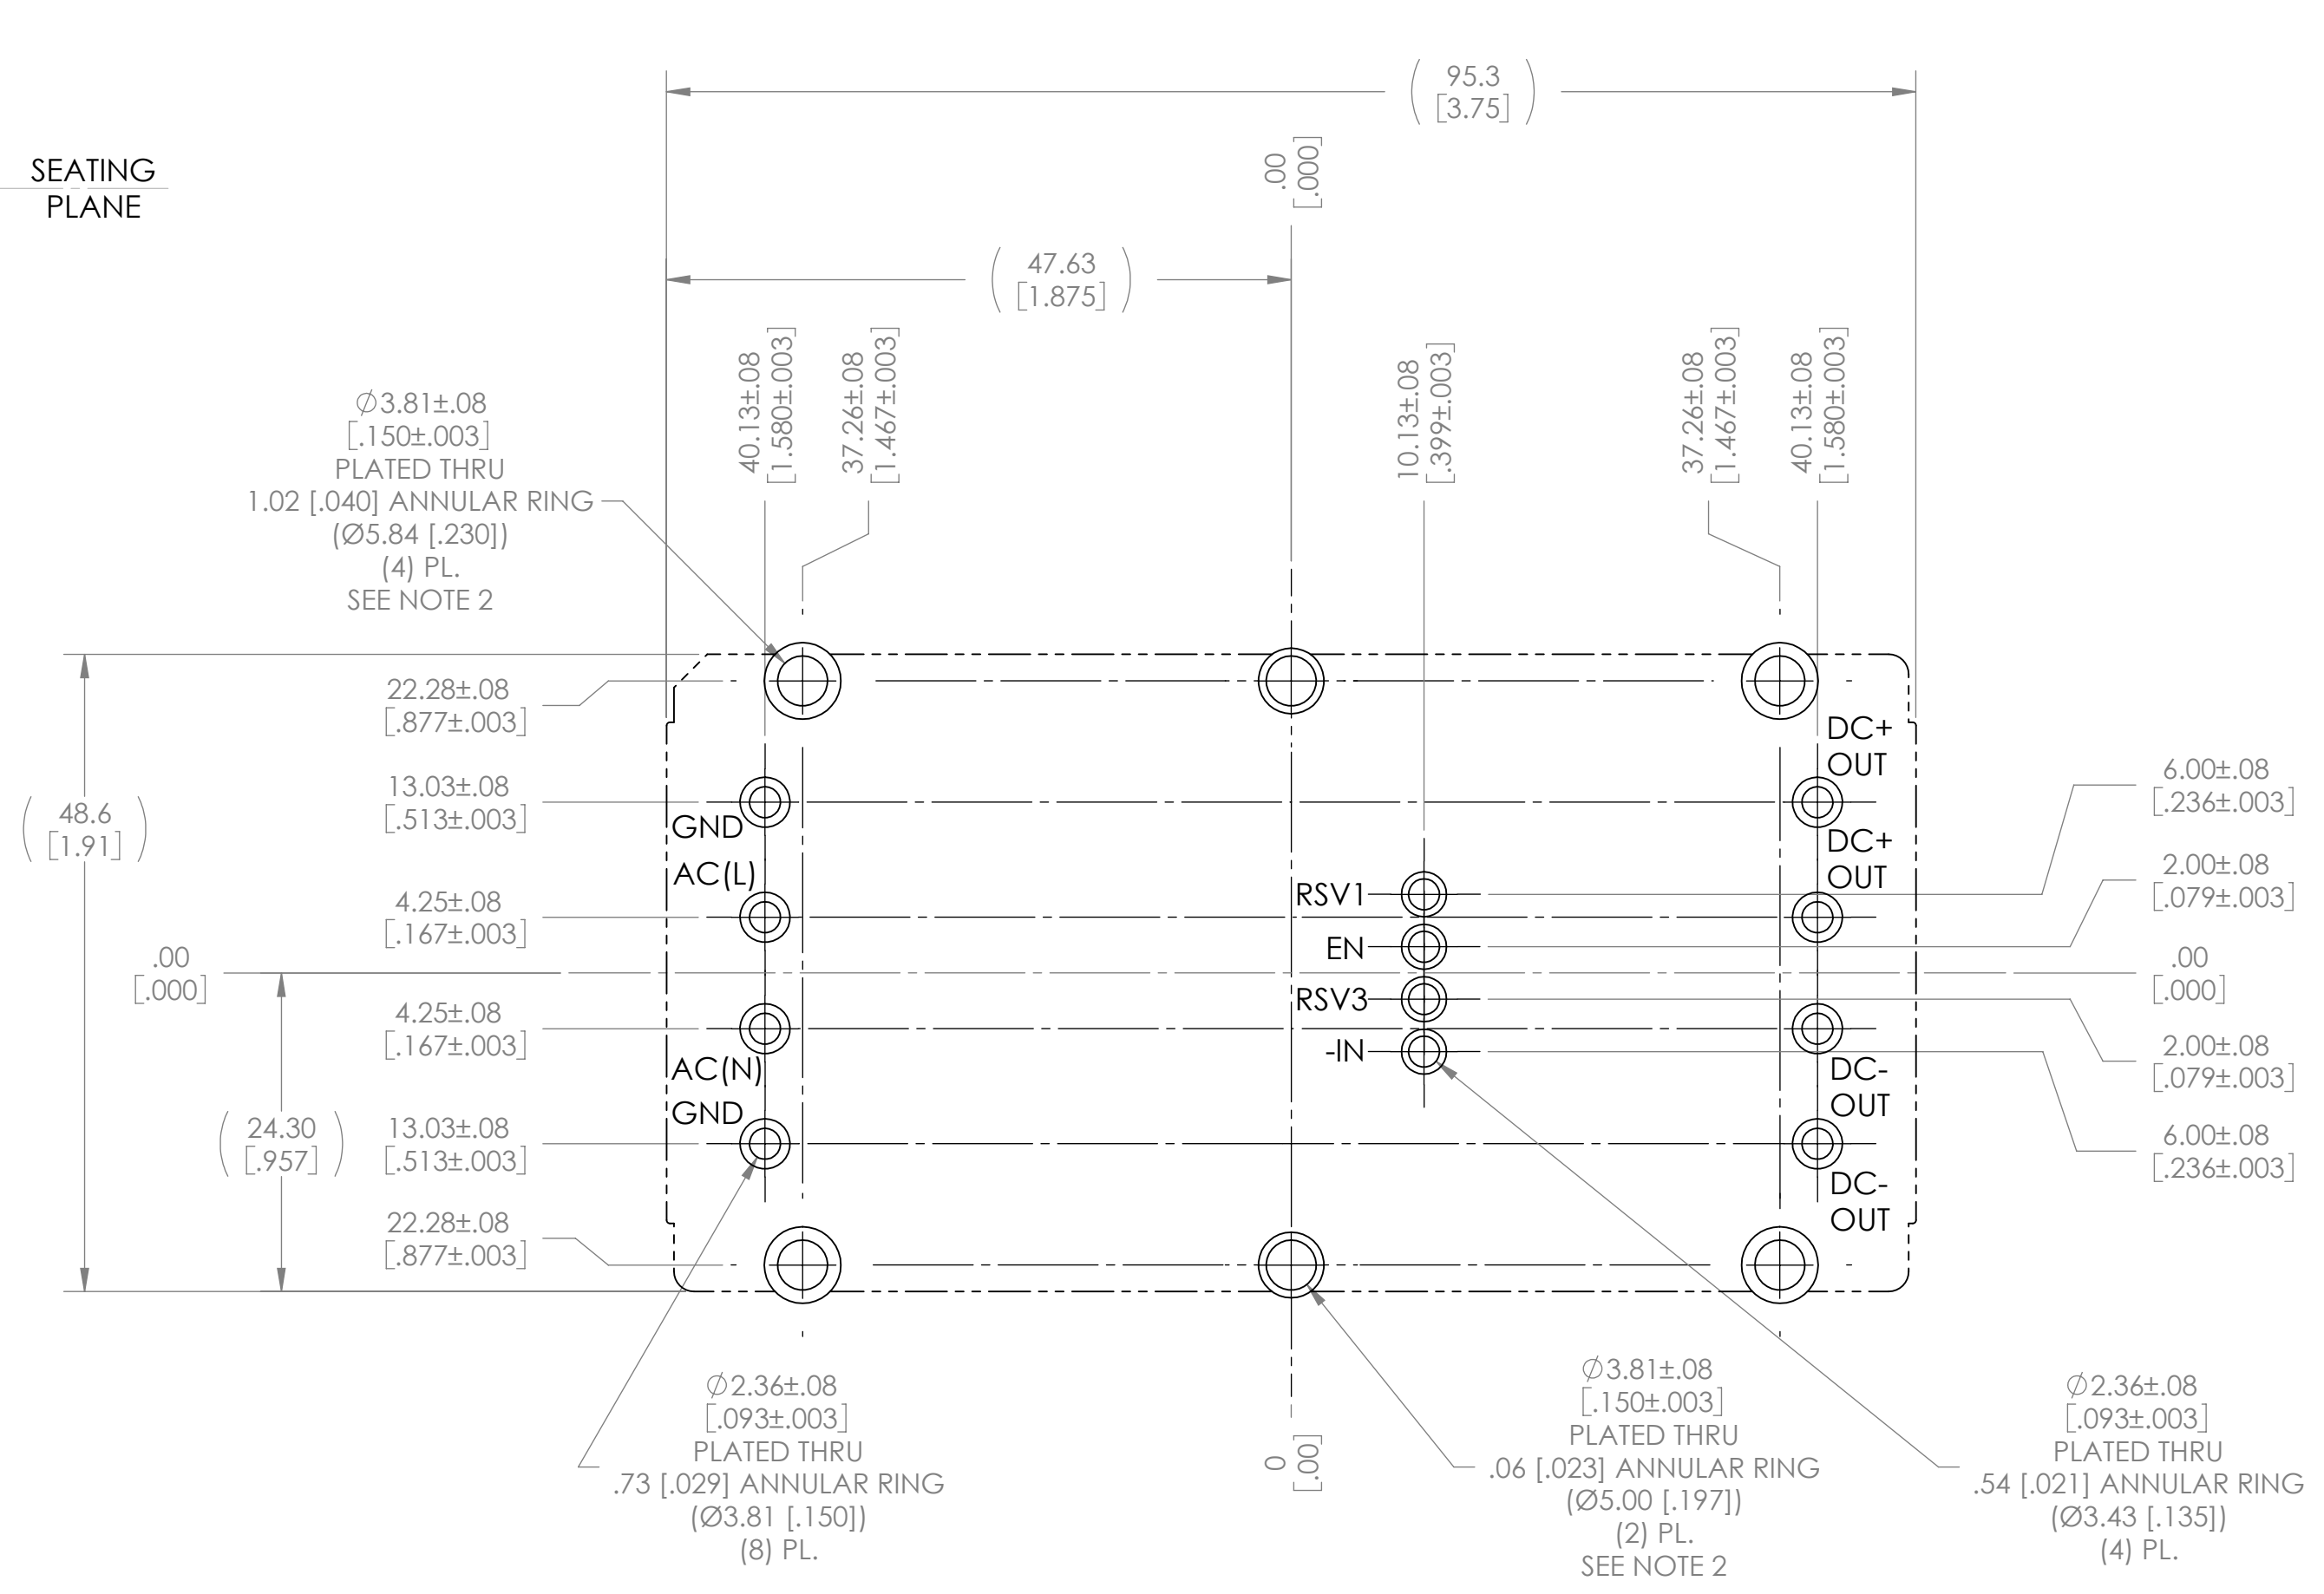
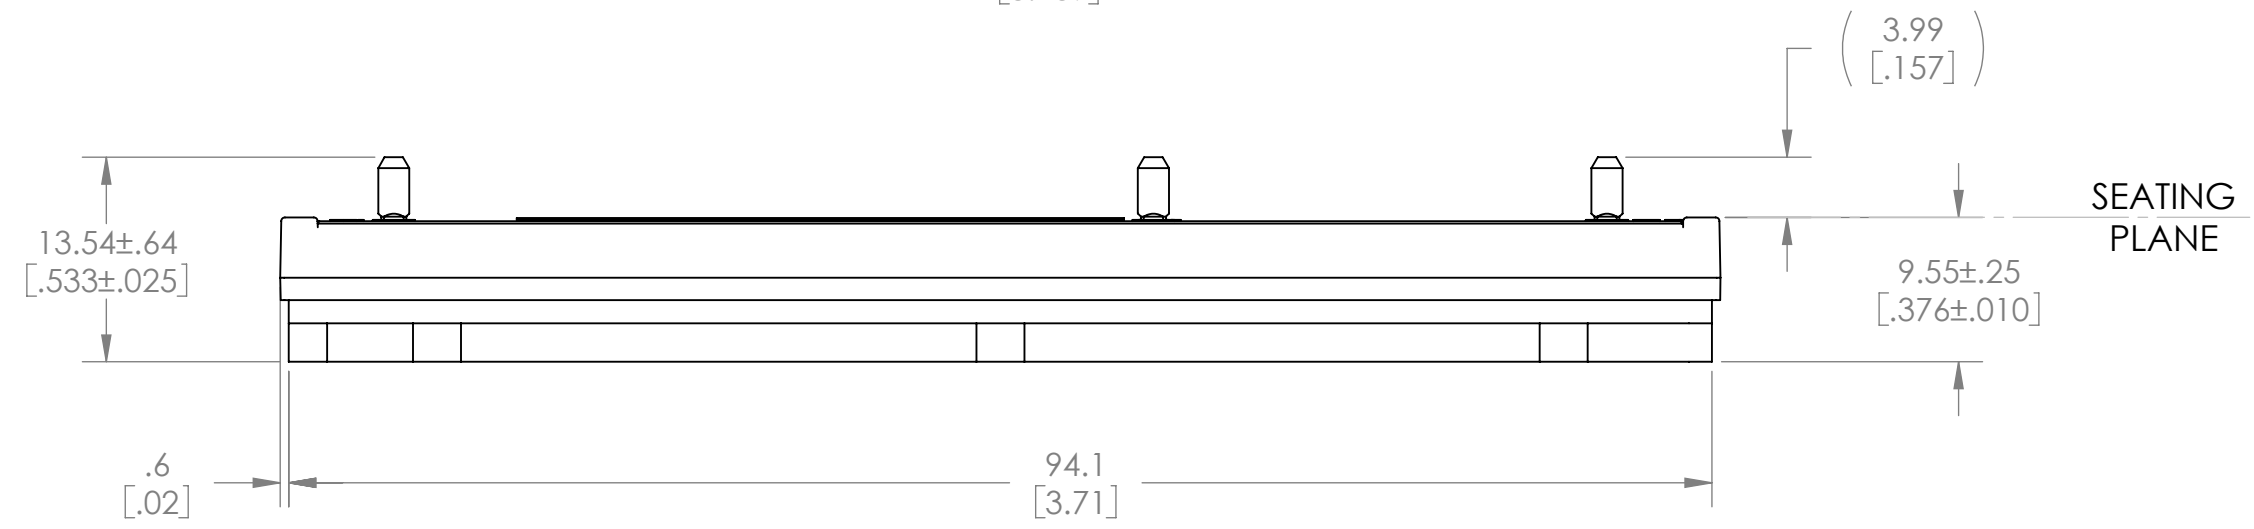
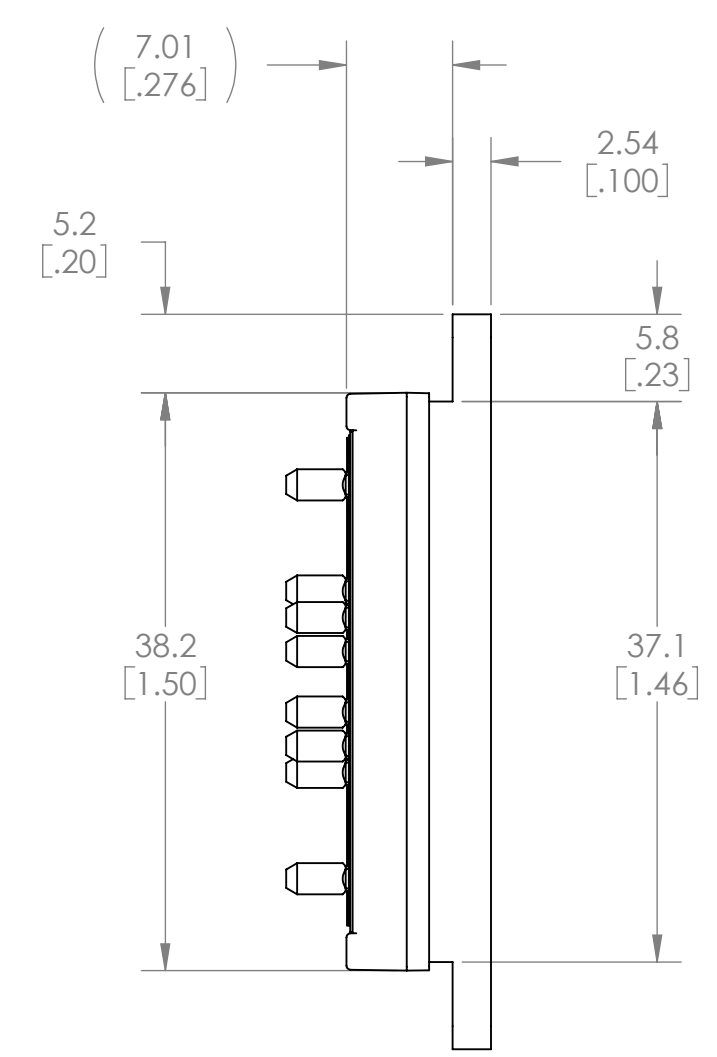


REV.	DESCRIPTION	DATE	APPROVED
1	RELEASED PER E120042	KUK 01/16/12	REJH

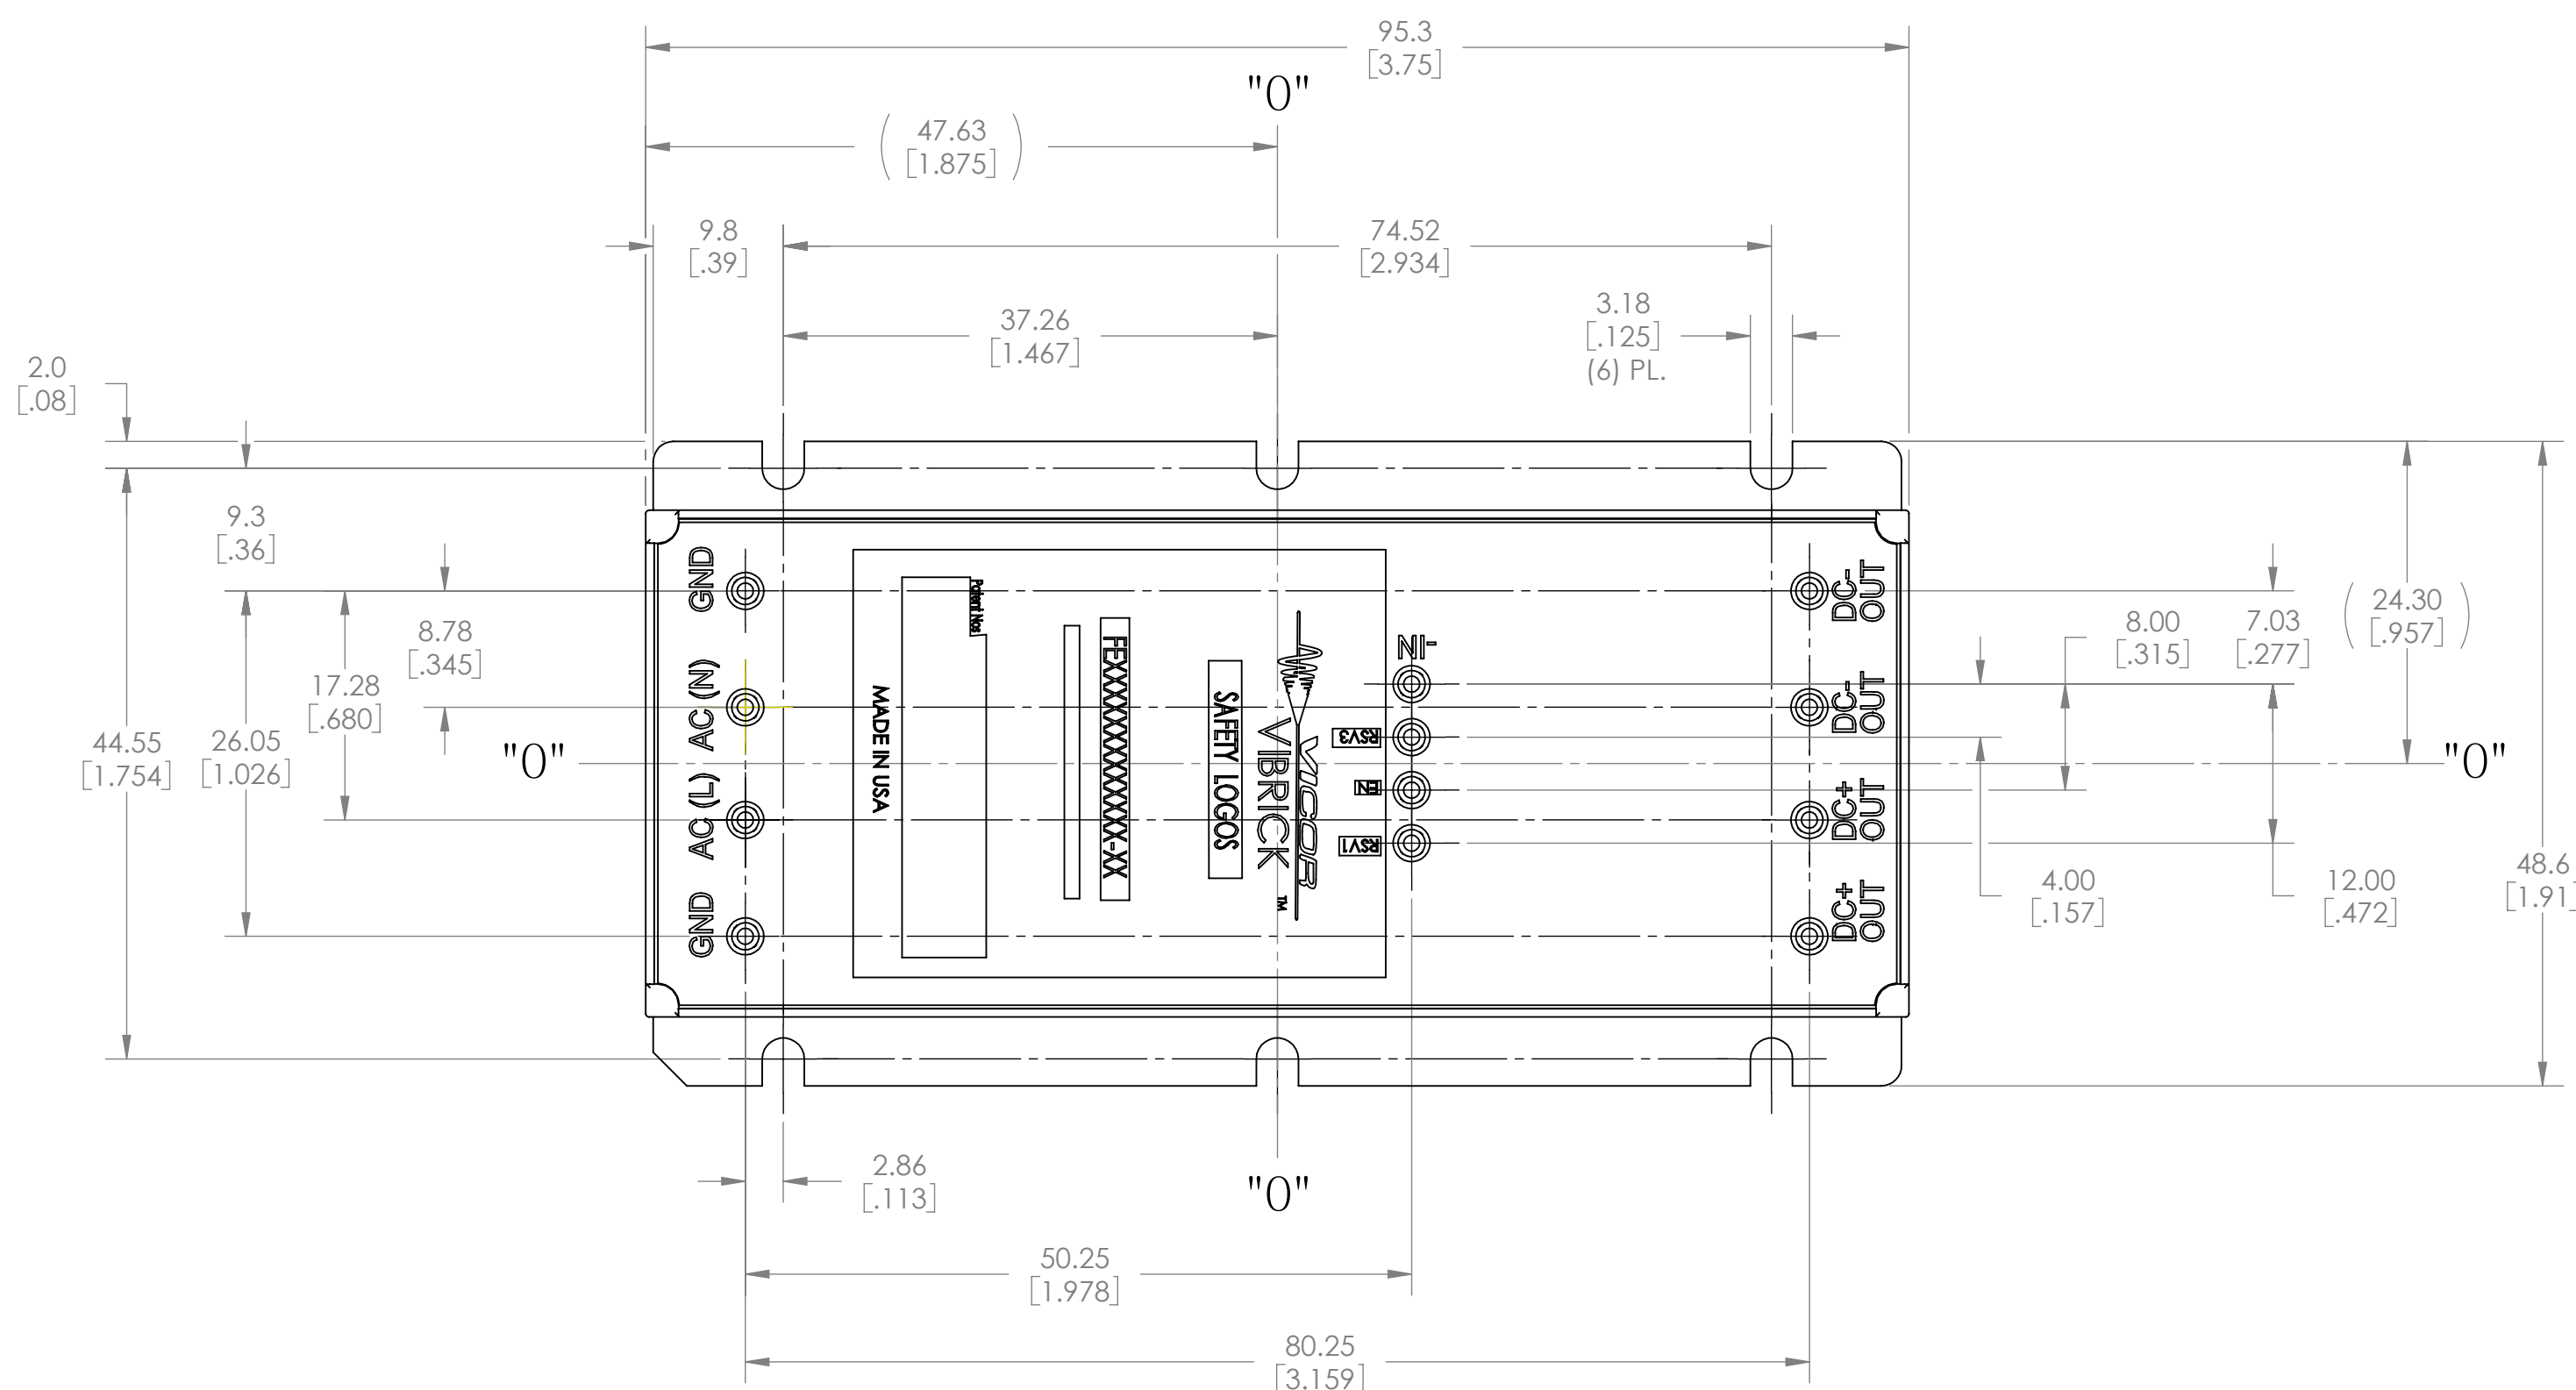

- NOTES:
- 1- RoHS COMPLIANT PER CST-0001 LATEST REVISION.
 - 2- PLATED THROUGH HOLES SHALL BE USED WITH VIBRICK STANDOFF KITS TO GROUND THE BASEPLATE TO THE CUSTOMERS PCB AND/OR COLD PLATE.

RECOMMENDED PCB PATTERN
 (COMPONENT SIDE SHOWN)

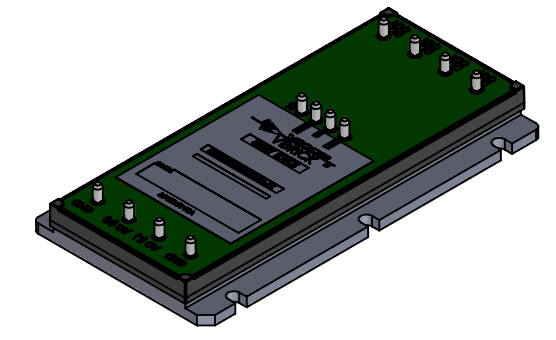

DRAWN BY R.E.J Hickey	DATE 11/30/2011	VICOR <small>SWD</small>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MM (INCH)		OUTLINE DWG AC/DC PFC FLANGED VIBRICK	
TOLERANCES ARE: DECIMALS ANGLES XXX (XX) = +0.25 (0.01) °1° XXXX (XXX) = ±0.127 (0.005)		SIZE D	CAGE CODE 67131
THIRD ANGLE PROJECTION		DWG NO 38069	REV 1
DO NOT SCALE DRAWING		SCALE 2:1	SHEET 1 OF 1