


VICOR CONFIDENTIAL
 THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR
 HEREWITH IS NOT TO BE REPRODUCED, USED OR
 DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT
 THE PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	INTL	DATE	APVD
1	RELEASED PER E140954a	SJW	10/30/14	RH

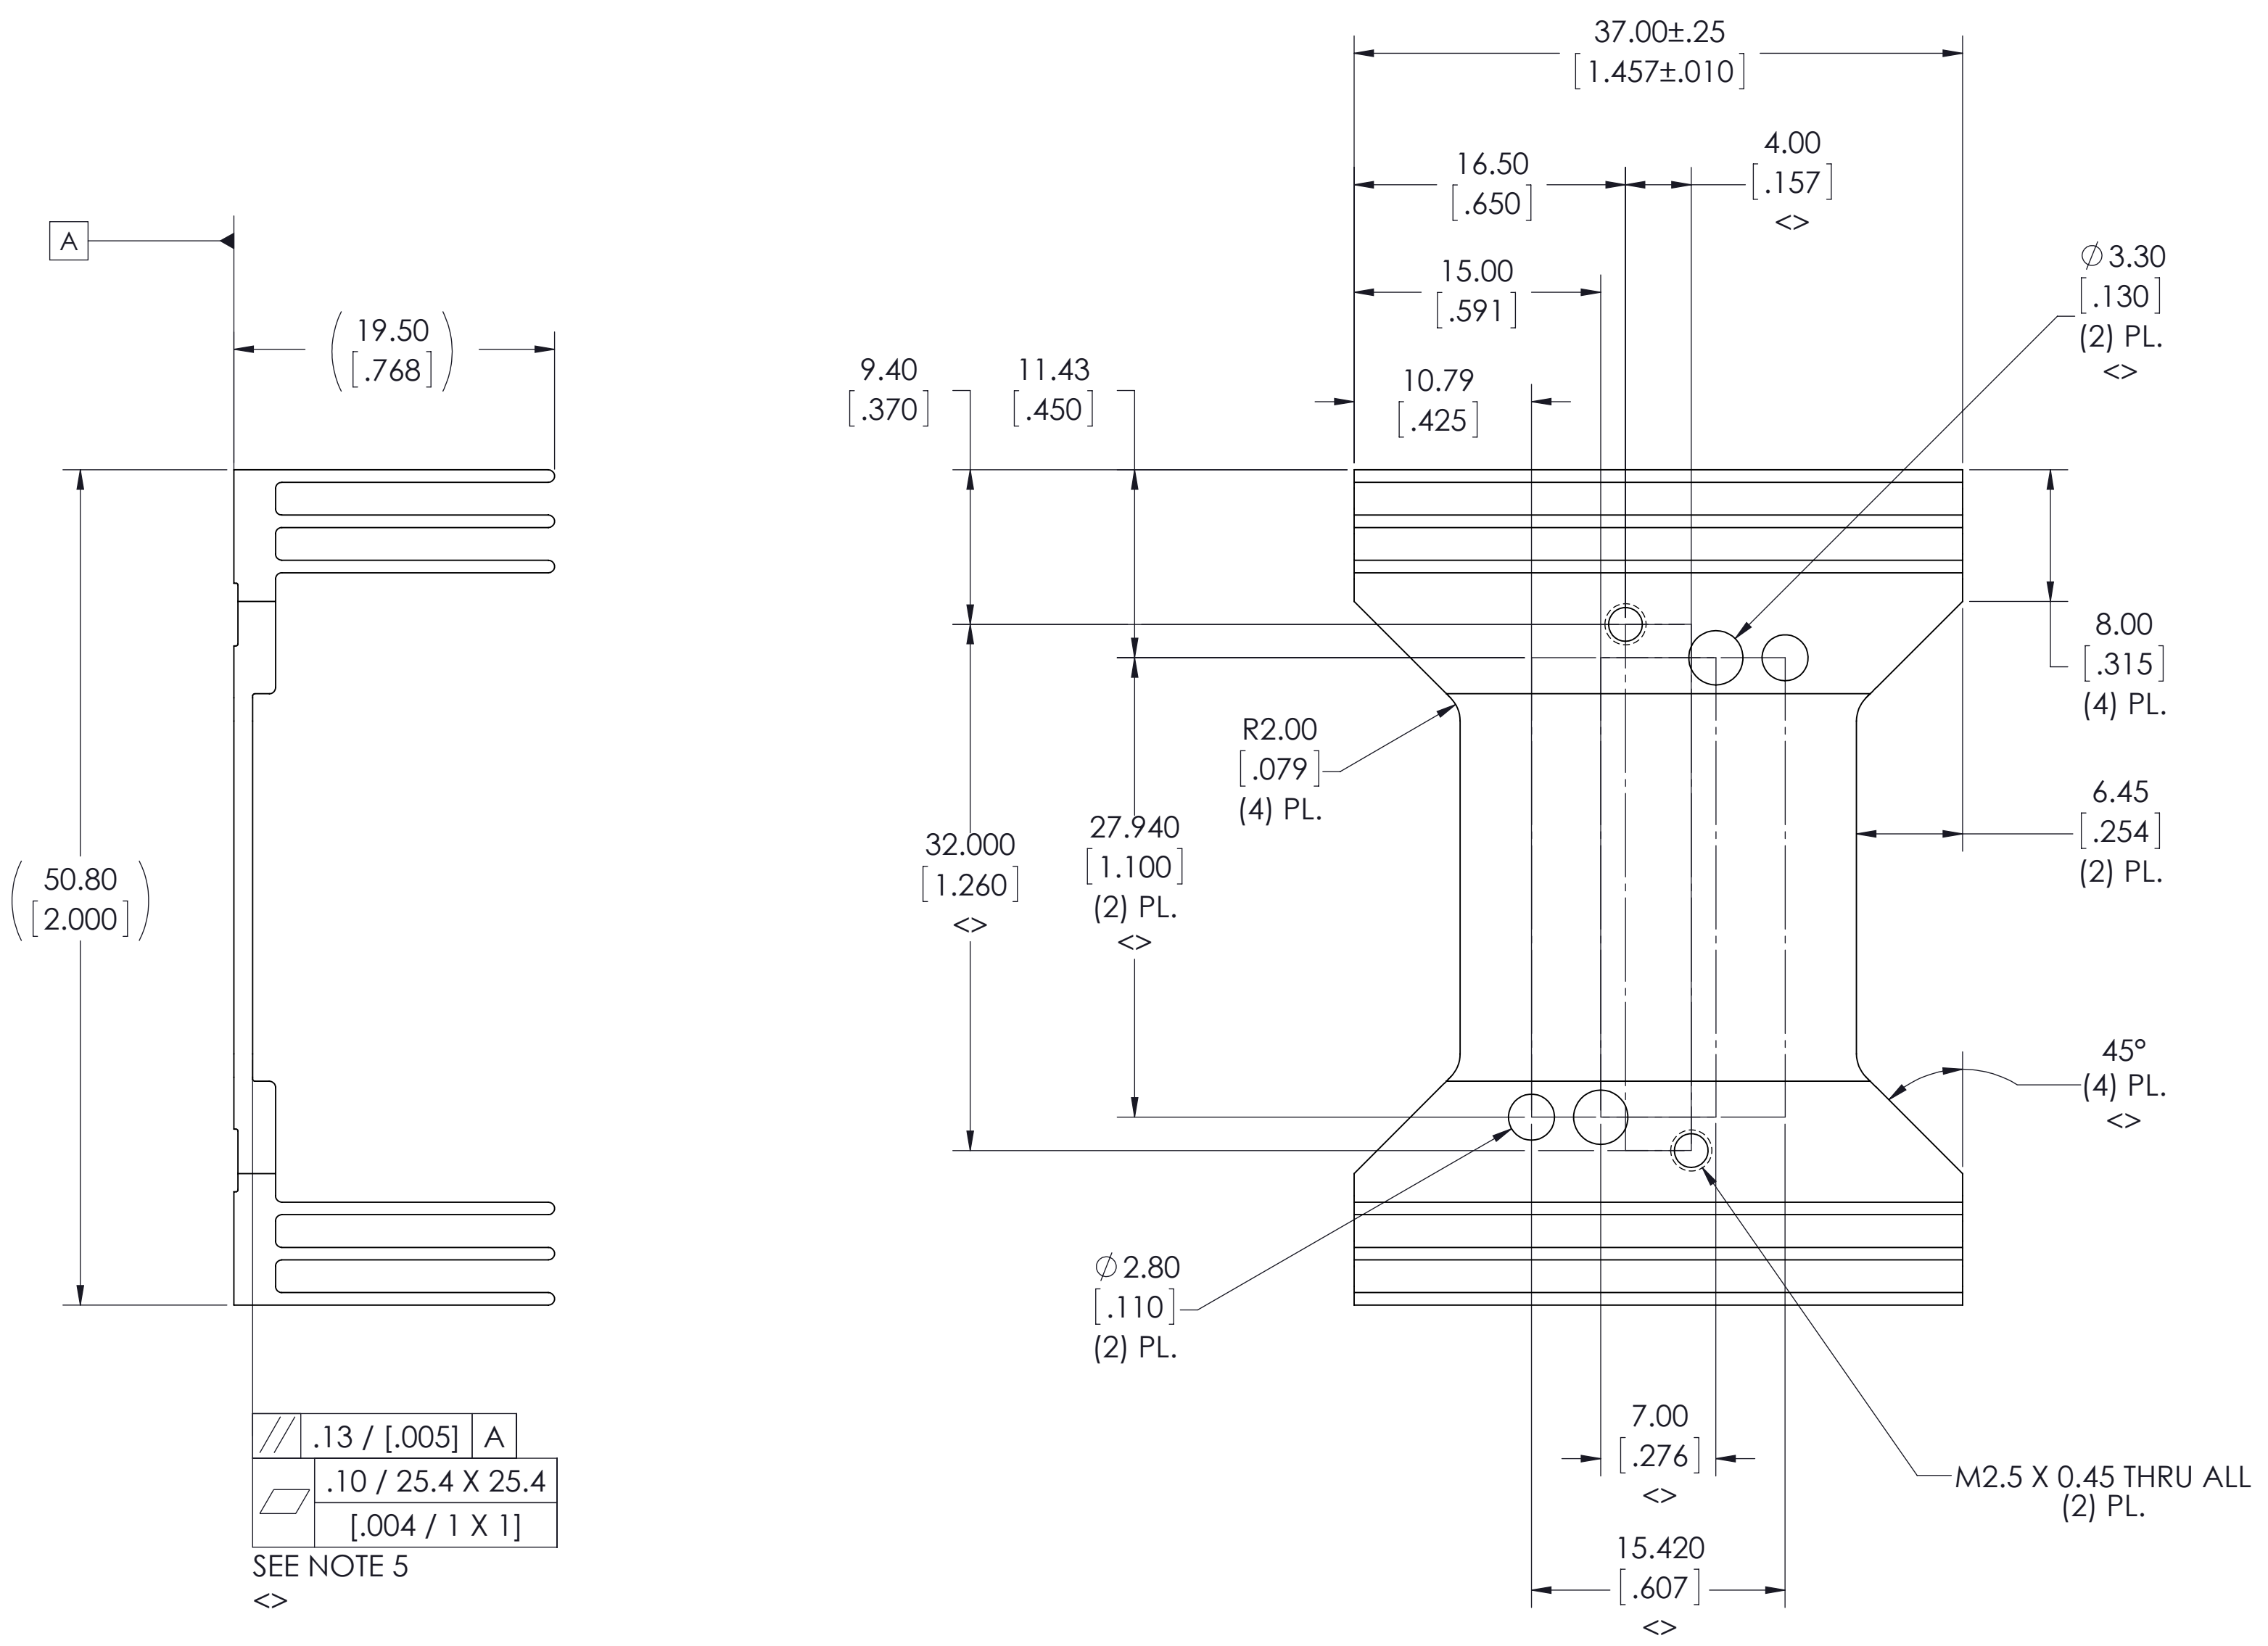

//	.13 / [.005]	A
▱	.10 / 25.4 X 25.4	
	[.004 / 1 X 1]	

SEE NOTE 5
 <>

NOTES:

1. CLEAR FINISH, RoHS COMPLIANT PER CST-0001, LATEST REVISION PER A.) CHROMIUM FREE, OR B.) TRIVALENT CHROMIUM IN ACCORDANCE WITH MIL-DTL-5541, TYPE II, CLASS 1A OR 3. SEE CST-0003 FOR TYPES OF AVAILABLE FINISHES.
2. SEE VICOR P/N 40510 FOR EXTRUSION PROFILE.
3. MATERIAL: ALUM ALLOY 6063-T5.
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
5. IF NECESSARY, EXTRUDE OVERSIZE AND MACHINE BASE AND INSIDE SURFACE TO ACHIEVE FLATNESS AND PARALLELISM.
6. <> DENOTES CRITICAL CHARACTERISTIC FOR LOT INSPECTION.

DRAWN BY	DATE	VICOR <small>SWD</small>			
Robert Wasik	9/6/2013	HEATSINK, BOTTOM, 3623 CHIP, FOR 11MM TOP-SIDE HEATSINK			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MM / [INCH]					
TOLERANCES ARE: DECIMALS ANGLES X.XX [X.X] = ±0.25 [0.01] ±1° X.XXX [X.XX] = ±0.127 [0.005]		SIZE	CAGE CODE	DWG NO	REV
THIRD ANGLE PROJECTION		C	67131	40250	1
DO NOT SCALE DRAWING		SCALE 3:1	SHEET 1 OF 1		